

LED TUBE HIGH EFFICIENCY INTERNAL DRIVER

****Pair of unshunted tombstones come with every T8 piece purchased.**

FEATURES

- Original brand LED solution with credible performance
- Integrated thermal design
- High efficiency, no light pollution
- All-glass housing for better aging (no warping effects).
- Over 140 Lumens/Watt for faster ROI on energy retrofits
- Five year warranty




APPLICATION

Office buildings, supermarkets




Technical specification

Part No.	Watt. (W)	lumens (lm)	CCT (K)	CRI (Ra)	PF	Size (ft)	Weight (lb)	DLC	
RDWT8G-12W/30K	12	1700	3000	80	0.9	Φ0.09"*L4'	0.68	LISTED	
RDWT8G-12W/40K	12	1700	4000	80	0.9	Φ0.09"*L4'	0.68	LISTED	
RDWT8G-12W/50K	12	1700	5000	80	0.9	Φ0.09"*L4'	0.68	LISTED	
Voltage			AC100-277V 50/60Hz						
Beam angle(°)			250						
Dimmable			No						
Body Material			Glass						
Location Type			Dry or Damp						
Working Temperature(°C)			-20~45						
Lifetime(H)			50000						
Voltage			100-277V						

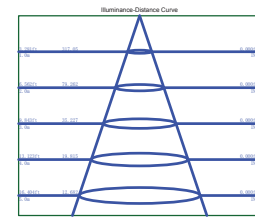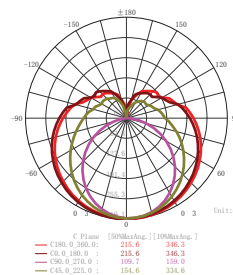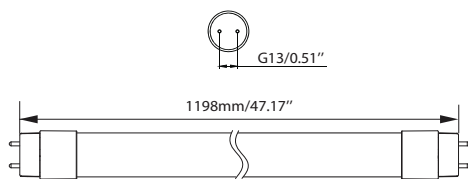

Mounting Method

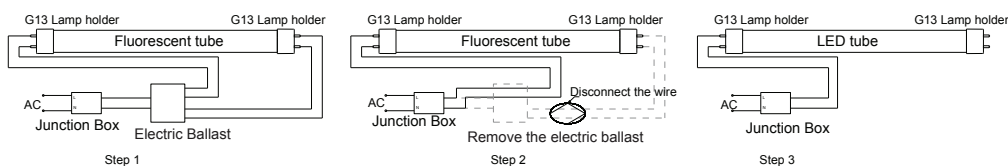

The Replacement information listed is provided to help inform users of the various assumptions, factors, and methods involved when making lighting replacement decisions, and is for general information purposes only. ReneSola America disclaims all responsibility for any outcomes resulting from the use of this tool. Any reliance you place on this tool is therefore strictly at your own risk.

RENESOLA AMERICA INC.
 1300 Clay Street, Suite 550, Oakland, CA 94612
 us.renesola.com | +1(415)-852-7421
 marketing.us@renesola.com